
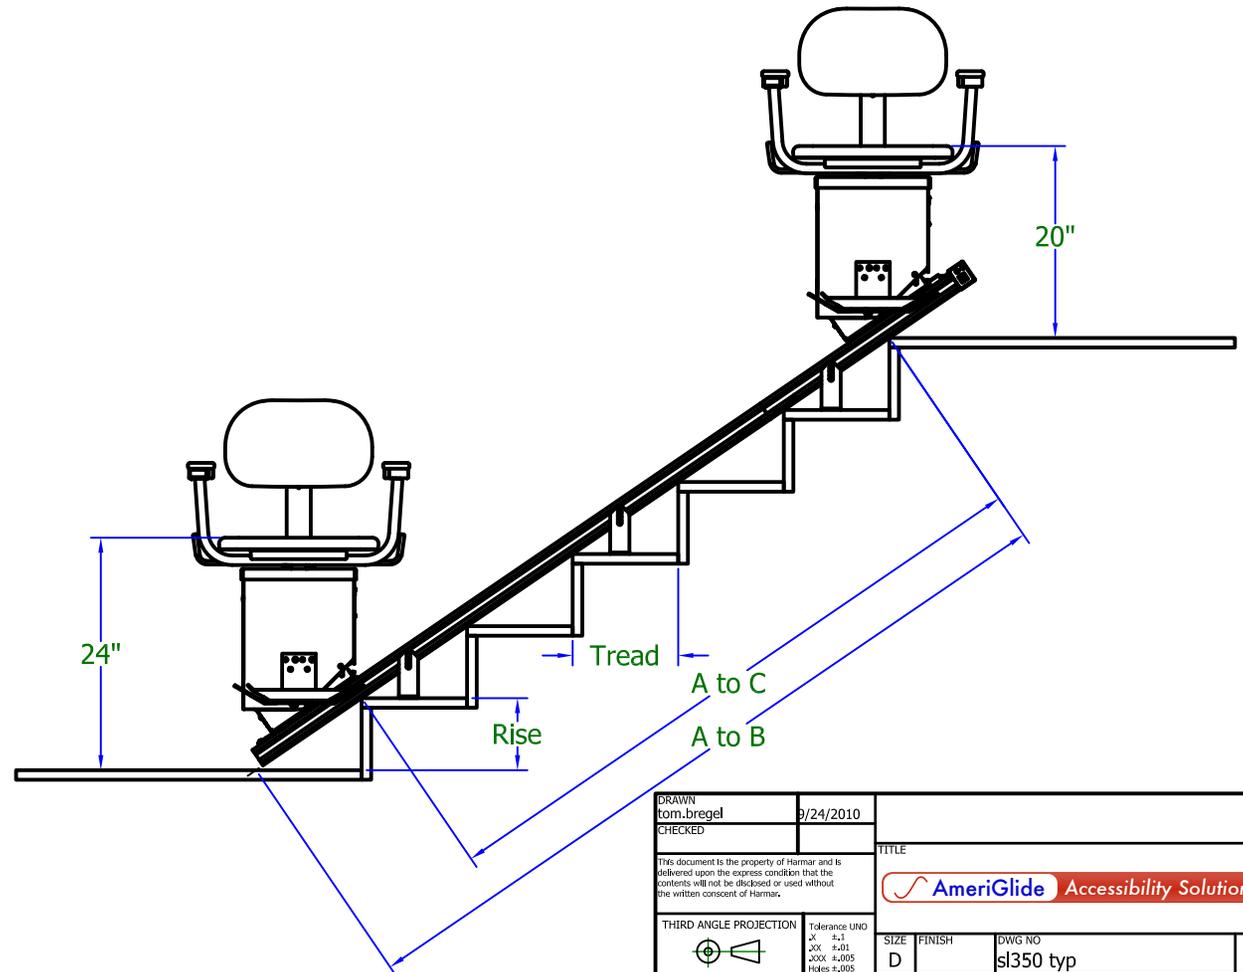
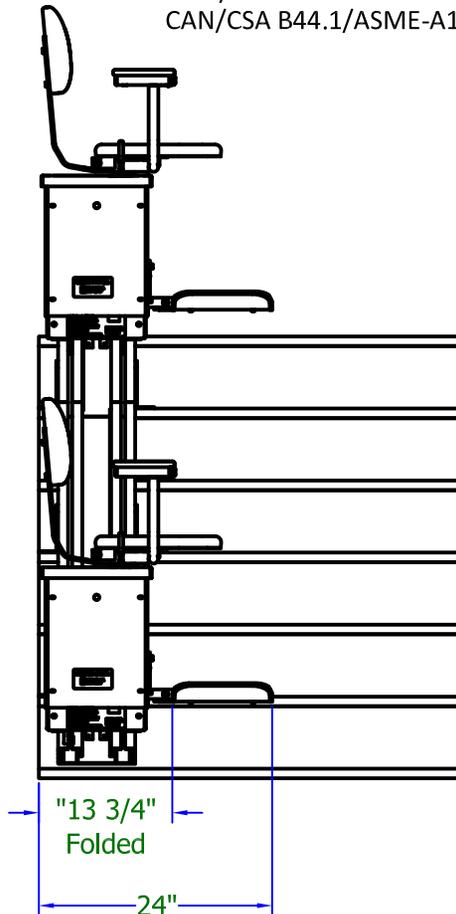


# AmeriGlide Rubex Stair Lift

## UNIT SPECIFICATIONS

Rated Load: 350 lbs. (over 16' of rail only rated to 250 lb)  
 Speed: 22 feet per minute  
 Travel: 20' Maximum  
 Electrical Requirement: 120 VAC grounded outlet  
 Motor: AC Model-1/3 HP 90VDC, DC Model-1/3 HP 24VDC  
 Incline Limits: 30° to 45°  
 Brake: Self-locking worm gear  
 Drive System: 3/16" dia. aircraft cable  
 Controls: Constant pressure with optional keylocks  
 Safety: Slack Rope  
 ETL Listed - Control No. 3148125  
 Stairway lift meets ASME A18.1-2005 section 4 & 7  
 ANSI/NFPA 70  
 CAN/CSA B44.1/ASME-A17.5-11

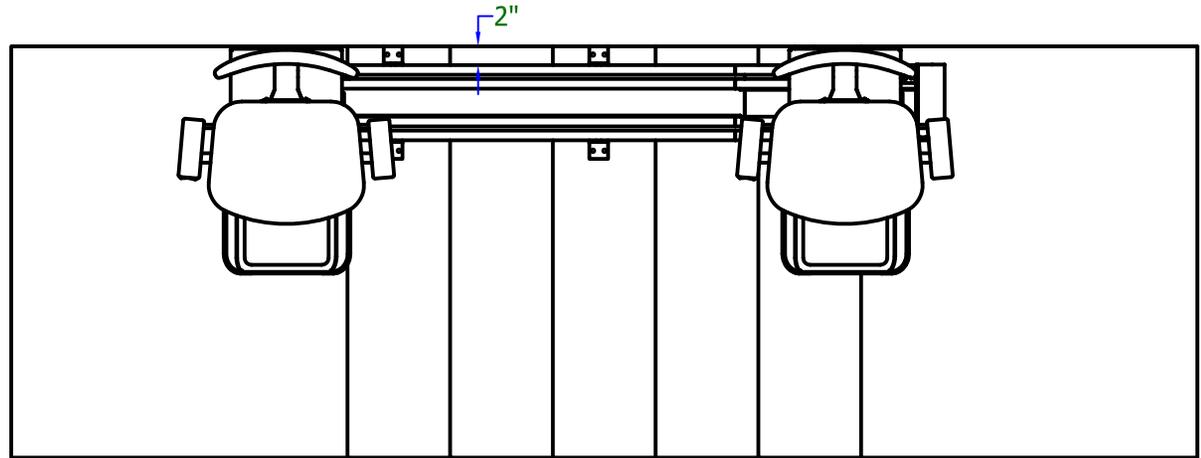

DRAWN tom.bregel	9/24/2010	TITLE	
CHECKED			
<small>This document is the property of Harmar and is delivered upon the express condition that the contents will not be disclosed or used without the written consent of Harmar.</small>		THIRD ANGLE PROJECTION 	Tolerance UNO .XX ±.1 .XX ±.01 .XXX ±.005 Notes ±.005 Ang ±.5°
SIZE D	FINISH	DWG NO sl350 typ	REV
SCALE		SHEET	1 OF 1