VICTORIAN ELEVATOR





5110 Atlantic Ave. Raleigh, NC 27616 1-800-790-1635 | AmeriGlide.com


1. GENERAL INFORMATION

1.1 Customer Information	1.2 Project
Contact Name	Quote Reference #
Date (MM/DD/YY)	Job Name
Phone	Location
Email	Notes


Standard Features

3 HP Winding Drum Drive System for two stops. 950lbs capacity, automatic LED cab lighting, automatic emergency cab lowering, automatic functionality, illuminated stainless steel car operating panel with digital position indicator, stainless steel call stations with digital position indicator, two electromechanical door locks, two LED pot lights, stainless steel handrail, 84" tall cab, concealed in-cabinet phone, and a sleek modern cab gate with optional operator.

2. Finished Hoistway Dimensions




3. Rail Location



4. Landings

○ 2*	○ 3	O 4				
5. Hoistway Construction						
Wood	○ Concre	ete				
6. Voltage						

7. CAB Dimension




8. CAB Configuration

\circ	Front Opening*		
\bigcirc	Pass Through (2 gates)		
\circ	90° Opening (2 gates)		

9. CAB Finishes



10. Gate Finishes



*standard


VICTORIAN ELEVATOR

ORDER FORM

IMPORTANT

OVERHEAD: Minimum overhead requirement in residential builds is 106 inches.

PIT DEPTH: Minimum depth requirement in residential builds is 10 inches.

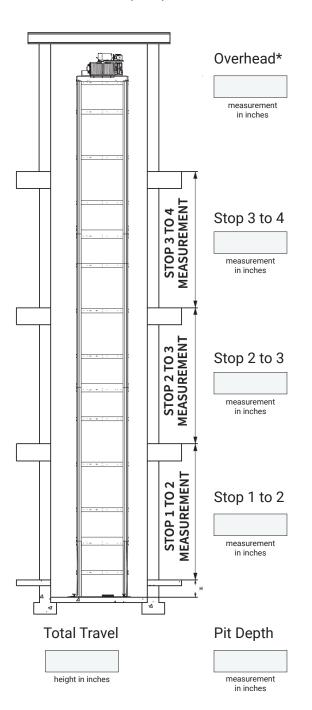

11. CAB Doors


Manual 4 Panel Gate (select finish on the previous page)

12. Landing Doors

Locks Only - Door by Others36" Wooden Door Jambs

13. Landing Door Swings

STOP 4	○ Right Hand ○ Left Hand ○ None
STOP 3	○ Right Hand ○ Left Hand ○ None
STOP 2	Right Hand Left Hand
STOP 1	○ Right Hand ○ Left Hand



14. Landing Door Location

RAIL LOCATION	○ A	○ B	○ C	O D	
STOP 4	○ A	○ B	○ C	\bigcirc D	○ None
STOP 3	○ A	○В	○ C	\bigcirc D	O None
STOP 2	○ A	○ B	\bigcirc C	\bigcirc D	○ None
STOP 1	○ A	ОВ	○ C	O D	

